

seamaster



9900

SYNLAC
SYNTHETIC

HIGH GLOSS

FINISH



MS ISO 9001:2000 REG. NO. AR 2480

9900
SYNLAC
SYNTHETIC
HIGH GLOSS
FINISH



Mistral SM2210
 (BS20C33)



French Pass SM116



Frost Blue SM1364



Honey Blue SM1142



Boat Race SM954
 (BS20E51)



Paradise Blue SM1365



Bright Blue SM1132



Wira Blue SM11227



Conifer SM13339



Gulf Blue SM11439



Blue Lagoon SM11438



Spruce SM9426



Pangkor SM13413



Spring Green SM1326



Crystal Mint SM1222



Emerald SM814



Ash Grey SM1306



Venus SM1406



Lavender Grey SM1307



Pearl White SM1301



Off White SM1300



Slate SM1325



Papier Grey SM1139



Ivory SM1130




Straw Cream SM1134



Primrose SM1303



Beige SM1302



Barbary Gold SM1329




Marigold SM1328



Oak SM1322




Rustic SM1332



Brown Velvet SM1324




Mahogany SM1136




Congo Brown SM1126



Leather SM9937

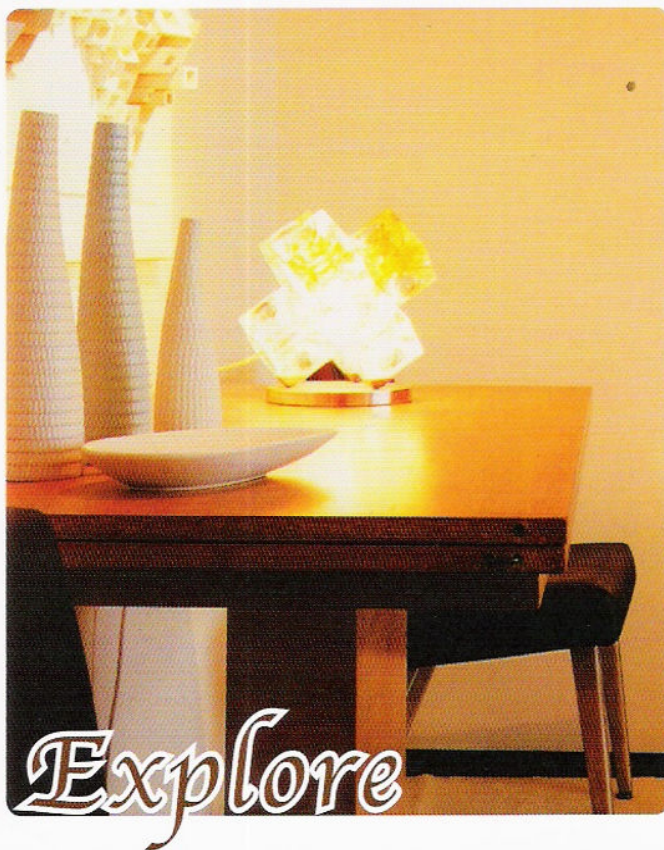

Flamingo SM1402



Valencia SM828
(BS04E51)



Fruity Peach SM2063



Sunset Gold SM1188
(BS06E50)



Sun Flower SM1505
(BS10E55)



Moon Raker SM1177



Mandarin SM1331



Madarin SM175



Celebration SM1504



Violet Time SM219
(BS22D41)



Sakura SM1143



Maverick SM935
(BS24E50)



Scarlet SM1506



Carnival Red SM1507

All colours presented are as close as modern printing technique allows.

* Also available in White 9102 & Black 9103



seamaster

**SEAMASTER 9900
SYNLAC SYNTHETIC
HIGH GLOSS FINISH**

PRODUCT DESCRIPTION:

Seamaster 9900 Synlac Synthetic High Gloss Finish is oil modified alkyd enamel paint, which provides excellent gloss. This product is also formulated to provide excellent durability, colourfastness and fungus resistant. 9900 Synlac is supply in various attractive colours; it is easy to apply to give a good glossy smooth surface.

This product has been tested and certified to SIRIM Malaysia Standard MS 1.25 : 1985 (Certificate No : PS010708).

USES:

As a finishing coat for the decoration and protection of the interior and exterior of wood or metal surfaces.

PHYSICAL CHARACTERISTICS:

| | |
|-------------------|---|
| Ingredient | Modified alkyd resin, mineral extenders, pigments and additives |
| Solvent | Mainly aliphatic hydrocarbon |
| Density | 0.90-1.30 (kg/litre) depending on colour |
| Solid | Approximately 60% |
| Viscosity | 135-145 secs (Ford Cup 4 at 27 ± 0.5°C) |
| Coverage | 12-14 m ² / litre |
| Colours | Refer to colour card |
| Gloss | High gloss |

PROPERTIES:

| | |
|---------------------------------------|--|
| Recommended Dry Film Thickness | 25-30 microns per coat |
| Drying Time | Touch dry: ≤ 3 hours Hard dry : ≤ 6 hours |
| Recoating Interval | Overnight |

SURFACE PREPARATION:

Wood Surface:

The woodwork must be dry and free from dirt and other contaminants. Smoothen the surface by sanding and dust off before applying the paint system.

Metal Surface:

Surface must be dry and free from efflorescence, dirt, grease, rust, and other contaminants before painting.

Previously Painted Surface:

Surface to be painted must be thoroughly clean, dry and free from dirt, grease, loose material or flaking paint. All loose paintwork must be scrapped off and defective areas should sanded down and spot primed with suitable undercoat before painting.

APPLICATION METHOD:

| | |
|------------------------------|--|
| Method of Application | Brush, roller or spray application |
| Product Preparation | Ready for use after thoroughly stirring. However, if thinning is required, not more than 10% of mineral turpentine may be added for brush and roller application; and for spray application up to 15-20% of mineral turpentine may be added. |

Manufactured By:

STAR CHEMICAL MANUFACTURERS (PTE) LTD
SEAMASTER PAINT (MANUFACTURING) BHD (Co. No: 11188P)
SEAMASTER PAINT (VIETNAM) CO. LTD.
TIONG SENG PAINT PRODUCTS (TAIWAN) LTD

Jurong Town
Johor Bahru
Ho Chi Minh, Hanoi
Taichung

-Singapore
-Malaysia
-Vietnam
-Taiwan

Marketing:

SEAMASTER PAINT MARKETING SDN. BHD. (Co. No: 101090T)
TIONG SENG PAINT PTE LTD

Johor Bahru, Malacca, Ipoh
Shah Alam, Juru, Kuching
Singapore

-Malaysia

www.seamasterpaint.com.my



The information contain herein is subject to change as may be required by the company without any further notice.